


# Project ventilation units

Prices 2022 – Sales International



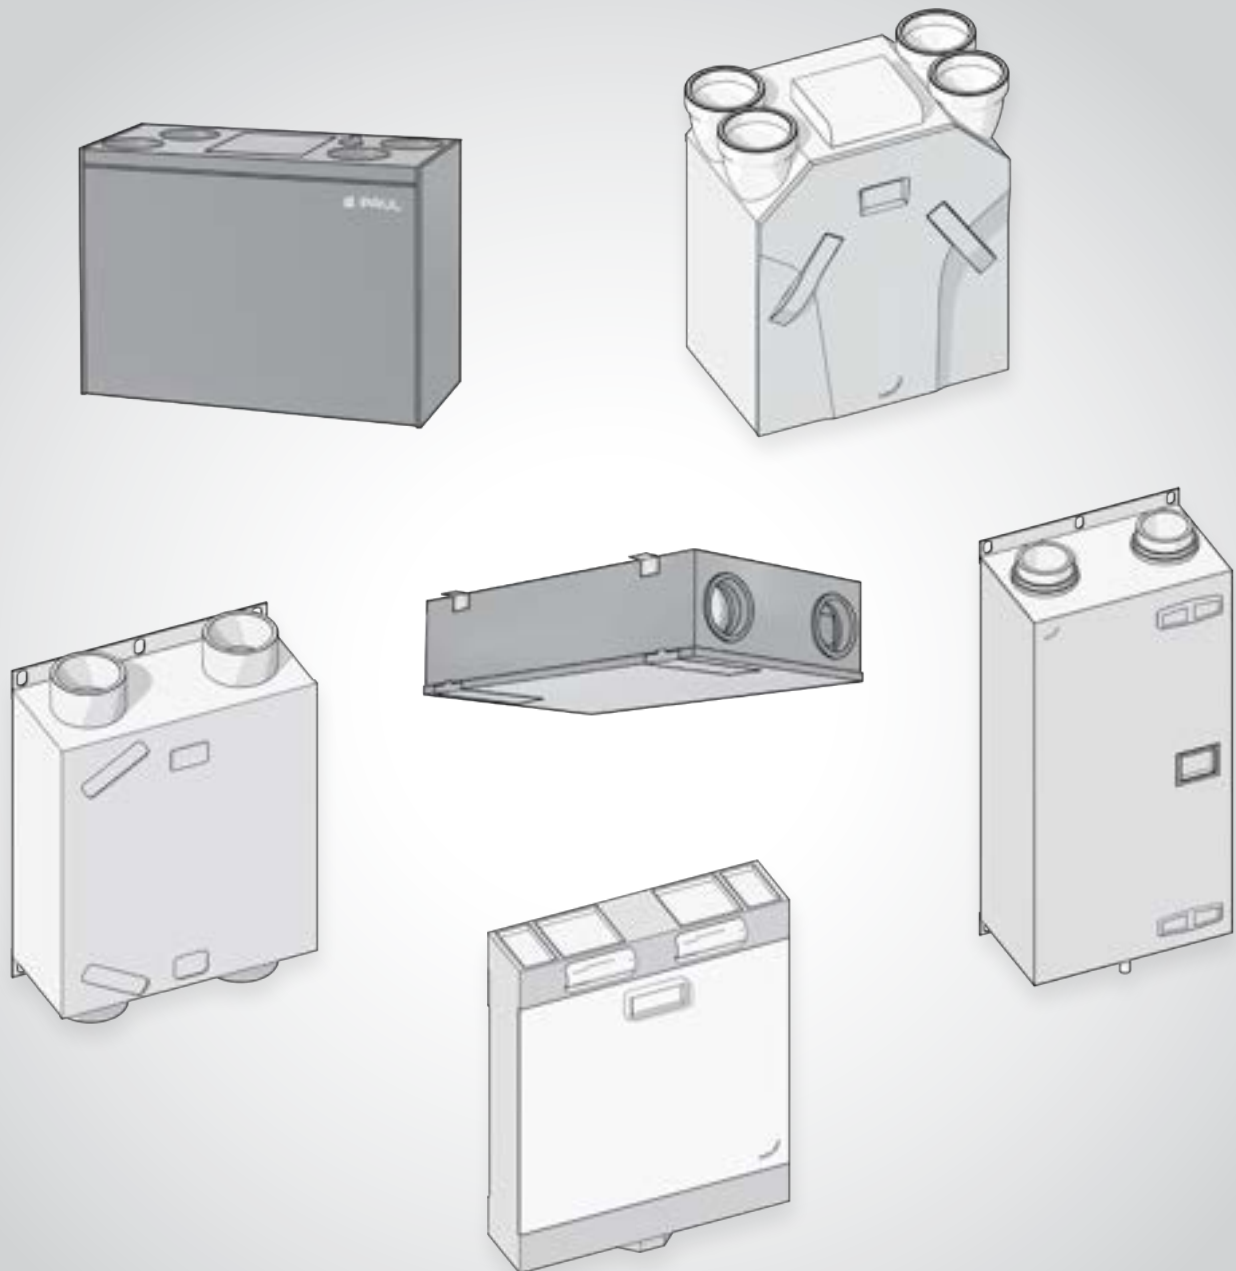

---









Zehnder	ComfoD 160	4
project ventilation units	ComfoD 180	5
	Focus 250 Base	6
	Climos 200 Eco F	7
	ComfoD 200	8
	ComfoAir Standard 300/375	9

---










**General Sales and Delivery Conditions:**

Our General Sales and Delivery Conditions apply.










You can find these under "Legal notice" on our homepage at [www.international.zehnder-systems.com](http://www.international.zehnder-systems.com)








Project ventilation units				
Product	Description	Article number	Gross price €	Discount group
<b>ComfoD 160</b>				
  Passive house certified	<b>ComfoD 160 comfort ventilation unit</b> 160 m <sup>3</sup> /h (100 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100 %, constant volume regulation, for wall and ceiling mounting, without three-stage switch Dimensions: 670 x 864 x 268 mm (W x H x D)	 * <b>471 218 200</b>	<b>2.649,00</b>	<b>C</b>
	<b>ComfoD 160 V comfort ventilation unit</b> 160 m <sup>3</sup> /h (100 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100 %, for wall and ceiling mounting, constant volume regulation <b>with pre-heater</b> , without three-stage switch Dimensions: 670 x 864 x 268 mm (W x H x D)	 * <b>471 218 205</b>	<b>3.046,50</b>	<b>C</b>
	<b>Three-stage switch,</b> in-wall, with 0 position for ComfoD 550, 350, 200, 180, 160	<b>990 210 154</b>	<b>78,70</b>	<b>C</b>
	<b>Three-stage switch,</b> in-wall, without 0 position for ComfoD 550, 350, 200, 180, 160	<b>659 000 120</b>	<b>67,00</b>	<b>C</b>
	<b>Three-stage switch,</b> in-wall, without 0 position, with fault indication for ComfoD 550, 350, 200, 180, 160	<b>659 000 300</b>	<b>101,90</b>	<b>C</b>
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 550, 350, 200, 180, 160 Suitable for 990 201 154	<b>990 210 155</b>	<b>30,40</b>	<b>C</b>
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 350, 200, 180, 160 Suitable for 659 000 120 and 659 000 300	<b>659 000 200</b>	<b>16,40</b>	<b>C</b>
	<b>Filter set for ComfoD 160, ISO Coarse ≥ 65 % (G4)</b> 2 pieces <i>FIL-CA160-SET-CRS/CRS</i>	<b>400 100 023</b>	<b>37,90</b>	<b>B</b>
	<b>Filter set for ComfoD 160, ISO Coarse ≥ 65 % / ISO ePM1 ≥ 65 % (G4 / F7)</b> 2 pieces <i>FIL-CA160-SET-CRS/ePM1</i>	<b>400 100 024</b>	<b>40,30</b>	<b>B</b>









\* Energy efficiency classes in accordance with EU regulation no. 1254/2014.  
 Energy efficiency classes are valid in connection with a three-stage switch.

Project ventilation units				
Product	Description	Article number	Gross price €	Discount group
<b>ComfoD 180</b>				
	<b>ComfoD 180 comfort ventilation unit</b> 180 m <sup>3</sup> /h (170 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100 %, for wall mounting, including wall plate, four connections upwards, alternative supply connector downwards, without three-stage switch Dimensions: 558 x 680 x 299 mm (W x H x D)	 * <b>471 212 200</b>	<b>2.122,30</b>	<b>C</b>
	<b>ComfoD 180 V comfort ventilation unit</b> 180 m <sup>3</sup> /h (170 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100 %, for wall mounting, including wall plate, four connections upwards, alternative supply connector downwards, <b>with pre-heater</b> , without three-stage switch Dimensions: 558 x 680 x 299 mm (W x H x D)	 * <b>471 212 205</b>	<b>2.497,50</b>	<b>C</b>
	<b>ComfoD 180 ERV comfort ventilation unit</b> 180 m <sup>3</sup> /h (170 Pa) airflow volume, cross-counterflow <b>enthalpy exchanger</b> with automatic summer bypass 100 %, for wall mounting, including wall plate, four connections upwards, alternative supply connector downwards, without three-stage switch Dimensions: 558 x 680 x 299 mm (W x H x D)	 * <b>471 212 330</b>	<b>3.246,90</b>	<b>C</b>
	<b>ComfoD 180 V ERV comfort ventilation unit</b> 180 m <sup>3</sup> /h (170 Pa) airflow volume, cross-counterflow <b>enthalpy exchanger</b> with automatic summer bypass 100 %, for wall mounting, including wall plate, four connections upwards, alternative supply connector downwards, <b>with pre-heater</b> , without three-stage switch Dimensions: 558 x 680 x 299 mm (W x H x D)	 * <b>471 212 335</b>	<b>3.621,00</b>	<b>C</b>
	<b>Three-stage switch,</b> in-wall, with 0 position for ComfoD 550, 350, 200, 180, 160	<b>990 210 154</b>	<b>78,70</b>	<b>C</b>
	<b>Three-stage switch,</b> in-wall, without 0 position for ComfoD 550, 350, 200, 180, 160	<b>659 000 120</b>	<b>67,00</b>	<b>C</b>
	<b>Three-stage switch</b> in-wall, without 0 position, with fault indication for ComfoD 550, 350, 200, 180, 160	<b>659 000 300</b>	<b>101,90</b>	<b>C</b>
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 550, 350, 200, 180, 160 Suitable for 990 201 154	<b>990 210 155</b>	<b>30,40</b>	<b>C</b>
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 350, 200, 180, 160 Suitable for 659 000 120 and 659 000 300	<b>659 000 200</b>	<b>16,40</b>	<b>C</b>
	<b>Filter set for ComfoD 180, ISO Coarse ≥ 65 % (G4)</b> 2 pieces <i>FIL-CA180-SET-CRS/CRS</i>	<b>400 100 090</b>	<b>37,90</b>	<b>B</b>
	<b>Filter set for ComfoD 180, ISO Coarse ≥ 65 % / ISO ePM1 ≥ 55 % (G4 / F7)</b> 2 pieces <i>FIL-SET-CA180-SET-CRS/EPM1</i>	<b>400 100 091</b>	<b>40,30</b>	<b>B</b>

\* Energy efficiency classes in accordance with EU regulation no. 1254/2014.  
 Energy efficiency classes are valid in connection with a three-stage switch.












Project ventilation units						
Product	Description	PU 1	PU 2	Article no.	Gross price €	Discount group
<b>Focus 250 Base</b>						
 	<b>Focus 250 Base comfort ventilation unit</b> 240 m <sup>3</sup> /h (140 Pa) airflow volume, cross-counterflow heat exchanger, EC fans with constant volume flow, for wall installation, including mounting rail, with control unit. Dimensions: 752 x 566 x 355 mm (W x H x D)					
	<b>Focus 250 Base L with left supply connector</b> <i>FCS250-BAS-L-7016</i>	1	4	527 009 550	2.045,70	E
	<b>Focus 250 Base R with right supply connector</b> <i>FCS250-BAS-R-7016</i>	1	4	527 009 560	2.045,70	E
	<b>Focus 250 Base L enthalpy with left supply connector</b> <i>FCS250-BAS-ERV-L-7016</i>	1	4	527 009 570	2.352,30	E
	<b>Focus 250 Base R enthalpy with right supply connector</b> <i>FCS250-BAS-ERV-R-7016</i>	1	4	527 009 580	2.352,30	E
	<b>Iso defroster heater DN 125</b> with 700 W PTC heating element including ISO Coarse ≥ 50 % (G3), without control unit <i>PRH-EPP-DN125-700W-CRS/G3</i>	1	20	527 003 450	256,50	C
	<b>Mounting base</b> height-adjustable = 280 mm – 320 mm <i>FRA-FCS200-GAL</i>	1	10	527 002 280	121,20	C
	<b>Dry siphon 5/4"</b> for Focus and Novus <i>SIP-5/4"-CA350/550-CF-L</i>	1	20	990 201 330	54,50	C
	<b>Filter set for Focus 200 / 250, ISO Coarse ≥ 70 % (G4)</b> 2 pieces <i>FIL-FCS-CRS/G4-2PC-PCK</i>	1	-	527 004 260	40,30	B
	<b>Filter set for Focus 200 / 250, ISO Coarse ≥ 70 % / ISO ePM1 ≥ 60 % (G4 / F7)</b> 2 pieces <i>FIL-FCS-CCP-CRS/G4-ePM1/F7-2PC-PCK</i>	1	-	527 003 430	44,60	B
	<b>Filter set for Focus 200 / 250, ISO ePM1 ≥ 60 % (F7)</b> 10 pieces <i>FIL-FCS-CCP-ePM1/F7-10PC-PCK</i>	1	-	527 009 750	200,10	B

Project ventilation units						
Product	Description	PU 1	PU 2	Article no.	Gross price €	Discount group
<b>Climos 200 Eco F</b>						
 	<p><b>Climos 200 Eco F enthalpy comfort ventilation unit</b>            200 m<sup>3</sup>/h (100 Pa) airflow volume, cross-counterflow enthalpy exchanger with integrated pre-heater, EC fans with constant volume flow, without condensate connection, for installation suspended from ceiling or wall, or installation in roof pitch, with control unit.            Dimensions: 594 x 1019 x 250 (W x L x H)</p> <p><b>Climos 200 Eco F enthalpy with right supply connector (type A)</b>  <i>CLI200-ERV-COM-ECO-A</i></p> <p><b>Climos 200 Eco F enthalpy with left supply connector (type B)</b>  <i>CLI200-ERV-COM-ECO-B</i></p>					
		1	4	527 006 320	2.447,30	E
		1	4	527 006 330	2.447,30	E
	<p><b>Set designer filter cover</b>            2 piece            Colour: RAL 3020  <i>ACC-COV-FIL-CLI200-3020-PCK</i></p>	1	15	528 007 870	96,70	C
	<p><b>Filter set for Climos 200, ISO Coarse ≥ 75 % (M5)</b>            2 pieces  <i>FIL-CLI 200-CRS/M5-2PC-PCK</i></p>	1	-	527 004 270	43,10	B
	<p><b>Filter set for Climos 200, ISO Coarse ≥ 75 % / ISO ePM1 ≥ 60 % (M5 / F7)</b>            2 pieces  <i>FIL-CLI 200-CRS/M5/ePM1/F7-2PC-PCK</i></p>	1	-	527 004 280	45,80	B
	<p><b>Access panel for dry wall installation</b>            suitable for Climos 200  <i>COV-SRV-L1300-W700-CLI200</i></p>	1	15	528 007 930	243,60	B

Project ventilation units				
Product	Description	Article number	Gross price €	Discount group
<b>ComfoD 200</b>				
  Passive house certified	<b>ComfoD 200 comfort ventilation unit</b> 200 m³/h (200 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100%, for wall and ceiling mounting, without three-stage switch Dimensions: 544 x 1200 x 328 mm (W x H x D) ComfoD 200 L with <b>left</b> supply connector ComfoD 200 R with <b>right</b> supply connector	 * 471 222 210 471 222 215	2.671,20 2.671,20	C C
	<b>ComfoD 200 V comfort ventilation unit</b> 200 m³/h (200 Pa) airflow volume, cross-counterflow heat exchanger with automatic summer bypass 100%, for wall and ceiling mounting, <b>with pre-heater</b> , without three-stage switch Dimensions: 544 x 1200 x 328 mm (W x H x D) ComfoD 200 VL with <b>left</b> supply connector ComfoD 200 VR with <b>right</b> supply connector	 * 471 222 310 471 222 315	3.075,60 3.075,60	C C
	<b>Three-stage switch,</b> in-wall, with 0 position for ComfoD 550, 350, 200, 180, 160	990 210 154	78,70	C
	<b>Three-stage switch,</b> in-wall, without 0 position for ComfoD 550, 350, 200, 180, 160	659 000 120	67,00	C
	<b>Three-stage switch</b> in-wall, without 0 position, with fault indication for ComfoD 550, 350, 200, 180, 160	659 000 300	101,90	C
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 550, 350, 200, 180, 160 suitable for 990 201 154	990 210 155	30,40	C
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 350, 200, 180, 160 suitable for 659 000 120 and 659 000 300	659 000 200	16,40	C
	<b>Filter set for ComfoD 200,</b> <b>ISO Coarse ≥ 65 % (G4)</b> 2 pieces	400 100 014	37,90	B
	<b>Filter set for ComfoD 200,</b> <b>ISO Coarse ≥ 65 % / ISO ePM1 ≥ 55 % (G4 / F7)</b> 2 pieces	400 100 013	40,30	B

\* Energy efficiency classes in accordance with EU regulation no. 1254/2014.  
 Energy efficiency classes are valid in connection with a three-stage switch.














Project ventilation units				
Product	Description	Article number	Gross price €	Discount group
<b>ComfoAir Standard</b>				
	<b>ComfoAir Standard 300 HRV comfort ventilation unit</b> 300 m <sup>3</sup> /h (100 Pa) airflow volume, cross-counterflow <b>heat</b> exchanger with automatic summer bypass 100 %, for wall mounting, incl. wall plate, <b>with &amp; without pre-heater</b> , different operation options available Dimensions: 702 x 851 x 572 mm (W x H x D)	 		
	ComfoAir Standard 300 <b>L</b> , left supply air connector	471 239 600	1.881,80	C
	ComfoAir Standard 300 <b>R</b> , right supply air connector	471 239 601	1.881,80	C
	ComfoAir Standard 300 <b>VL</b> , pre-heater & left supply air connector	471 239 602	2.043,20	C
	ComfoAir Standard 300 <b>VR</b> , pre-heater & right supply air connector	471 239 603	2.043,20	C
	<b>ComfoAir Standard 375 HRV comfort ventilation unit</b> 375 m <sup>3</sup> /h (100 Pa) airflow volume, cross-counterflow <b>heat</b> exchanger with automatic summer bypass 100 %, for wall mounting, incl. wall plate, with & without pre-heater, different operation options available Dimensions: 702 x 851 x 572 mm (W x H x D)	 		
	ComfoAir Standard 375 <b>L</b> , left supply air connector	471 239 608	1.989,40	C
	ComfoAir Standard 375 <b>R</b> , right supply air connector	471 239 609	1.989,40	C
	ComfoAir Standard 375 <b>VL</b> , pre-heater & left supply air connector	471 239 610	2.141,10	C
	ComfoAir Standard 375 <b>VR</b> , pre-heater & right supply air connector	471 239 611	2.141,10	C
	<b>ComfoAir Standard 375 ERV comfort ventilation unit</b> 375 m <sup>3</sup> /h (100 Pa) airflow volume, cross-counterflow <b>enthalpy</b> exchanger with automatic summer bypass 100 %, for wall mounting, incl. wall plate, <b>with &amp; without pre-heater</b> , different operation options available Dimensions: 702 x 851 x 572 mm (W x H x D)	 		
	ComfoAir Standard 375 <b>L ERV</b> , left supply air connector	471 239 616	2.571,50	C
	ComfoAir Standard 375 <b>R ERV</b> , right supply air connector	471 239 617	2.571,50	C
ComfoAir Standard 375 <b>VL ERV</b> , pre-heater & left supply air connector	471 239 618	2.742,50	C	
ComfoAir Standard 375 <b>VR ERV</b> , pre-heater & right supply air connector	471 239 619	2.742,50	C	
	<b>ComfoSense 55 control panel</b> for ComfoAir 160, 180, 200, 350 and 550 suitable for installation into Jung, Gira and Busch-Jaeger switch ranges. Including 2 covers in RAL 9016 and 2 covers in RAL 9001 <i>CU-CFS55-9001/9016</i>	655 010 200	273,30	C
	<b>ComfoSense 67 control panel</b> for ComfoAir 160, 180, 200, 350 and 550 Including cover frame, cover and surface-mounted housing in RAL 9016 <i>CU-CFS67-HSG-9016</i>	655 010 215	280,50	C
	<b>Remote-controlled control panel</b> as an additional handset for the ComfoSense control panel <i>CU-RF-Z1</i>	655 000 755	120,00	C
	<b>ComfoSense connection cable</b> for direct connection of the ComfoSense with built-in time control on the main PCB, length 250 mm <i>CON-CAB-CFS-ELT-PCK</i>	400 300 207	28,00	C

\* Energy efficiency classes in accordance with EU regulation no. 1254/2014.

Energy efficiency classes for ComfoAir Standard are valid in connection with a three-stage switch or ComfoSense control panel.

\*\* Energy efficiency classes for ComfoAir Standard are valid in connection with a CO<sub>2</sub> sensor.

Project ventilation units				
Product	Description	Article number	Gross price €	Discount group
<b>ComfoAir Standard</b>				
	<b>Three-stage switch,</b> in-wall, with 0 position for ComfoD 350, 200, 180, 160 & ComfoAir Standard 300/ 375	990 210 154	78,70	C
	<b>Three-stage switch,</b> in-wall, without 0 position for ComfoD 350, 200, 180, 160 & ComfoAir Standard 300/ 375	659 000 120	67,00	C
	<b>Three-stage switch,</b> in-wall, without 0 position, with fault indication for ComfoD 350, 200, 180, 160 & ComfoAir Standard 300/ 375	659 000 300	101,90	C
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 350, 200, 180, 160 & ComfoAir Standard 300/ 375 suitable for 990 201 154	990 210 155	30,40	C
	<b>Surface-mounted housing for three-stage switch</b> for ComfoD 350, 200, 180, 160 & ComfoAir Standard 300/ 375 suitable for 659 000 120 and 659 000 300	659 000 200	16,40	C
	<b>5-wire cable</b> for operation of the ComfoAir Standard ventilation unit with a 3-stage switch, length 2500 mm	400 300 208	22,60	C
	<b>CO<sub>2</sub>-Sensor V55</b> , 55 mm for In-wall installation, suitable with most cover frames (not included) <i>SNS-CO2-V55</i>	655 000 845	364,10	C
	<b>CO<sub>2</sub>-Sensor V67</b> , 67 mm for In-wall installation, cover frame in scope of delivery <i>CO2-SENSOR-0-10V-67</i>	655 000 850	364,10	C
	<b>CO<sub>2</sub>-Sensor V67</b> , 67 mm for On-wall installation, on-wall socket and cover frame in scope of delivery <i>CO2-SENSOR-0-10V-67-ON-WALL</i>	655 000 855	380,50	C
	<b>LUXE PCB upgrade set</b> add-on set for connection on the existing PCB of the ComfoAir Standard ventilation unit for connection of Zehnder CO <sub>2</sub> sensors	471 230 005	455,70	B
	<b>ComfoAir Standard mounting base</b>	642 300 135	165,60	C
	<b>Dry siphon 5 / 4"</b> for ComfoAir 350 / 550 and ComfoFond-L Eco	990 201 330	54,50	C
	<b>Zehnder Pre-heater kit</b>	471 230 000	403,30	C
	<b>Filter set for ComfoD 350,</b> ISO Coarse ≥ 60 % (G4) 2 pieces <i>FIL-PFR-L500-W16.5-H197-SEL-CRS-2pc</i>	400 100 085	47,60	B
	<b>Filter set for ComfoD 350,</b> ISO Coarse ≥ 60 % / ISO ePM1 ≥ 50 % (G4 / F7) 2 pieces <i>FIL-PFR-L500-W16.5-H197-SEL-CRS/ePM1</i>	400 100 084	50,40	B

\* Energy efficiency classes in accordance with EU regulation no. 1254/2014.  
Energy efficiency classes for ComfoAir Standard are valid in connection with a three-stage switch or ComfoSense control panel.



